



TEMPTATION

Recycling bin

FFJ3

| | |
|---------------------------|---|
| Volume | 55 / 108 / 55 Liter |
| Compartments | 3 |
| Casing material | 1.4301 (AISI 304) stainless steel, brushed |
| Casing material thickness | 1,5 mm |
| Inner liner material | galvanized steel Leak-proof |
| Width | 1182 mm |
| Depth | 532 mm |
| Height | 897 mm |
| Weight | approx. 75,0 kg |
| Slot size | 140 x 140 mm 320 x 140 mm 140 x 140 mm |
| Accessoires / Options | see FEATURES |

AUWEKO GmbH · Dornhofstraße 34 · 63263 Neu-Isenburg
Telefon: +49 6103 804955-0 · Fax: +49 6103 804955-10 · Email: vertrieb@auweko.de · Website: www.auweko.de


Copyright declaration:

All sketches, drawings and electronic information are the property of AUWEKO GmbH in Neu-Isenburg. The use of these documents, hard copies or information is permitted for internal purposes only. Forwarding to third parties is not authorised. Subject to technical alteration. © AUWEKO GmbH, 63263 Neu-Isenburg

TEMPTATION

Recycling bin

FFJ3

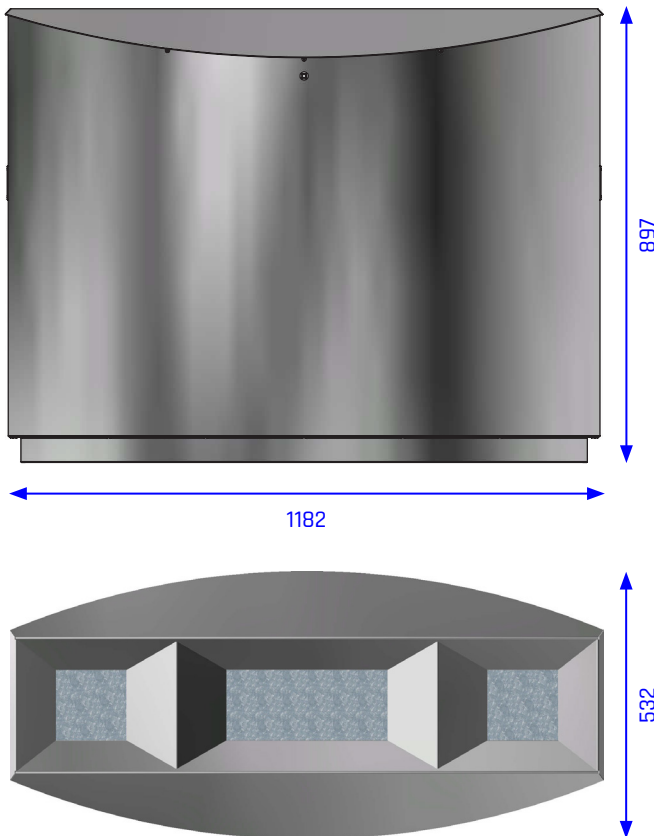

Description: Self-supporting, curved fronts and flat side panels made of stainless steel, secured with an internal construction of galvanized steel, provide great stability. The tops funnel-shaped openings guide waste into the inner liners and are also an elementary part of the fire protection (patented and certified).

Safety: The galvanized inner liners are sealed by a patented system. In the event of a fire, the rising smoke gases collect below the funnel-shaped openings. The resulting gas cushion interrupts the oxygen supply and a self-extinguishing effect occurs. In addition, the construction (inner liners / outer body) minimizes the increase in temperature at, above and below the casing in the event of fire. A snap lock protects the receptacle against unauthorized access.

Handling: Quick and easy removal of the waste bags from above. The top part of the bin automatically swivels upwards by means of a gas spring after operating the lock (1/4 turn). The contents are now visible and the waste bags can be replaced as required.